



## ◎ Q Series Cooler Hub I-O及電源關係式

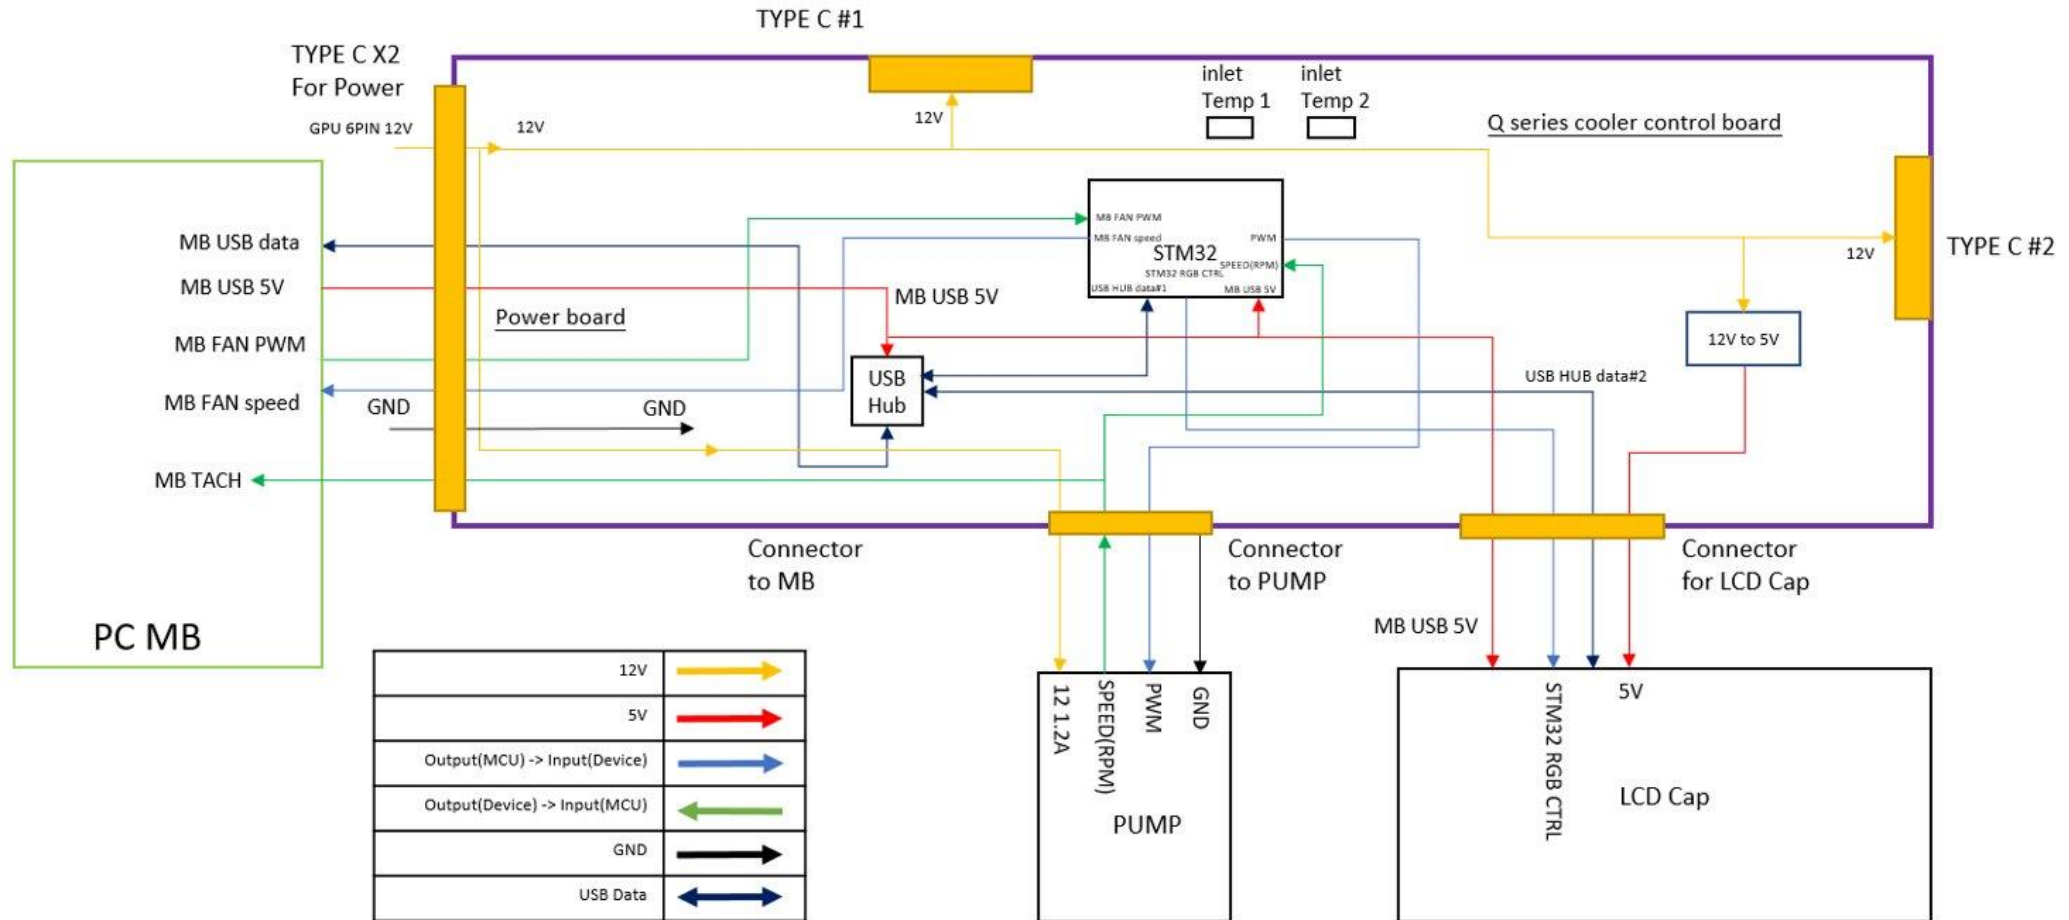


## Block diagram – Q60\_LCD Cap

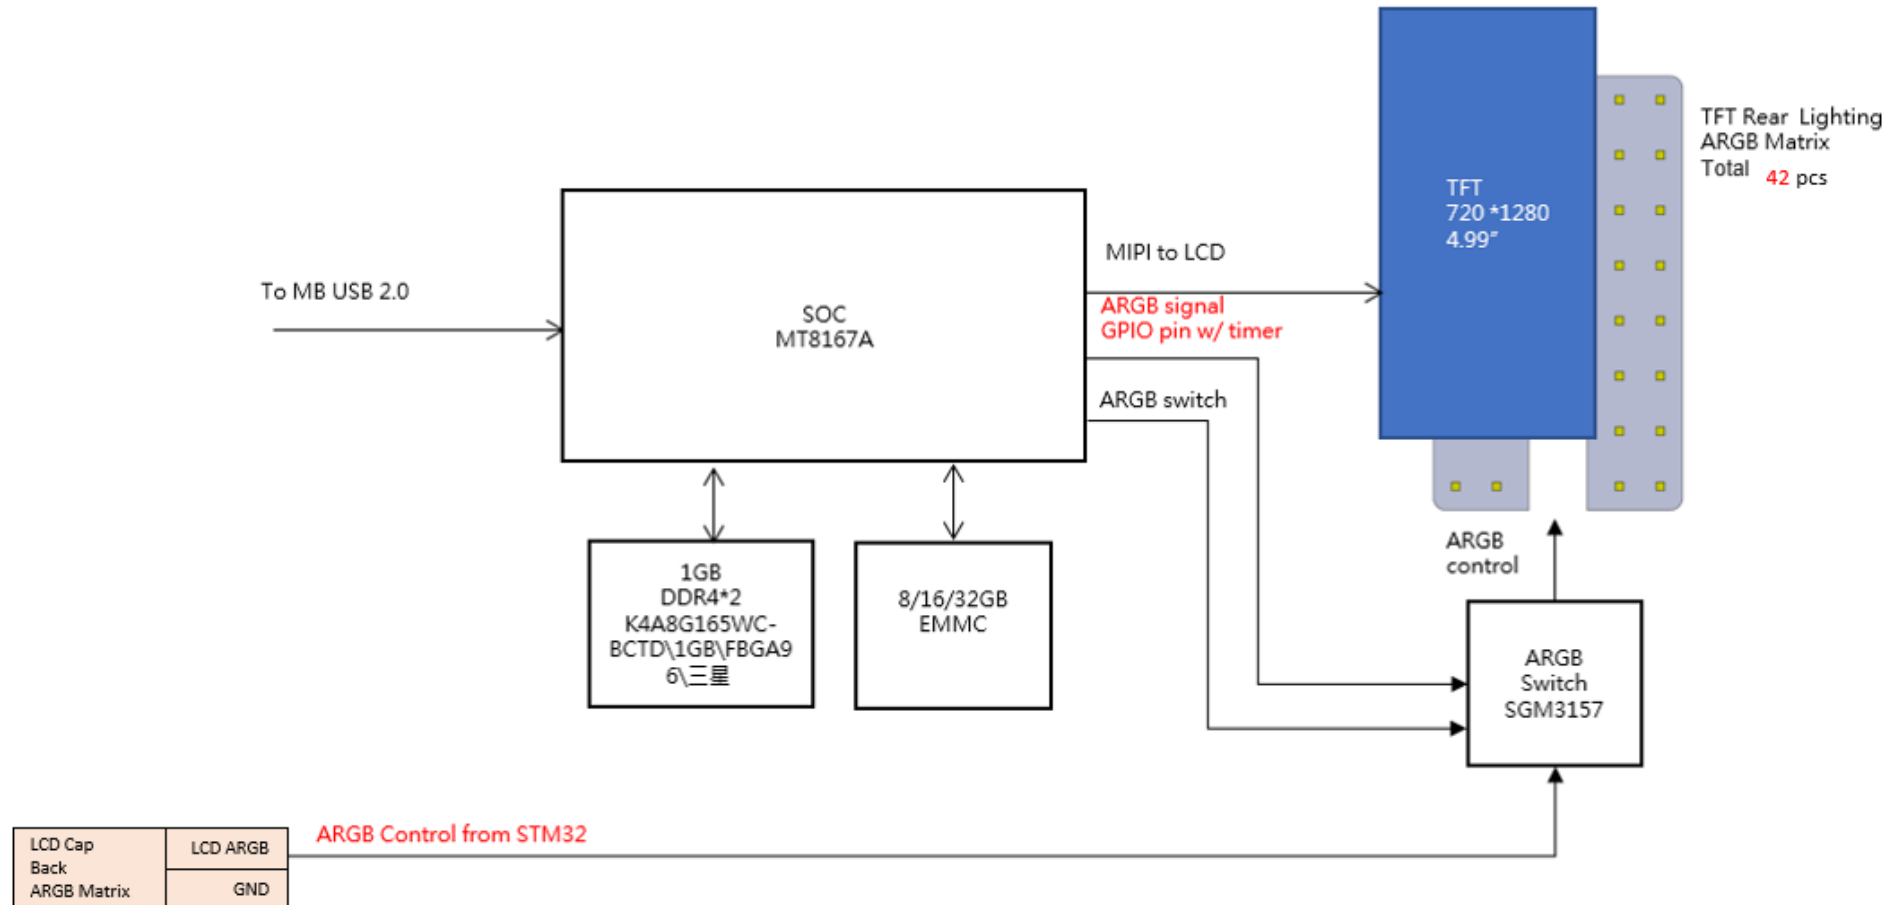


Type C connector change all cable inside 5V connecting to 12V

## HyteBus 24PIN Define

Type-C(24PIN) male




(power output)

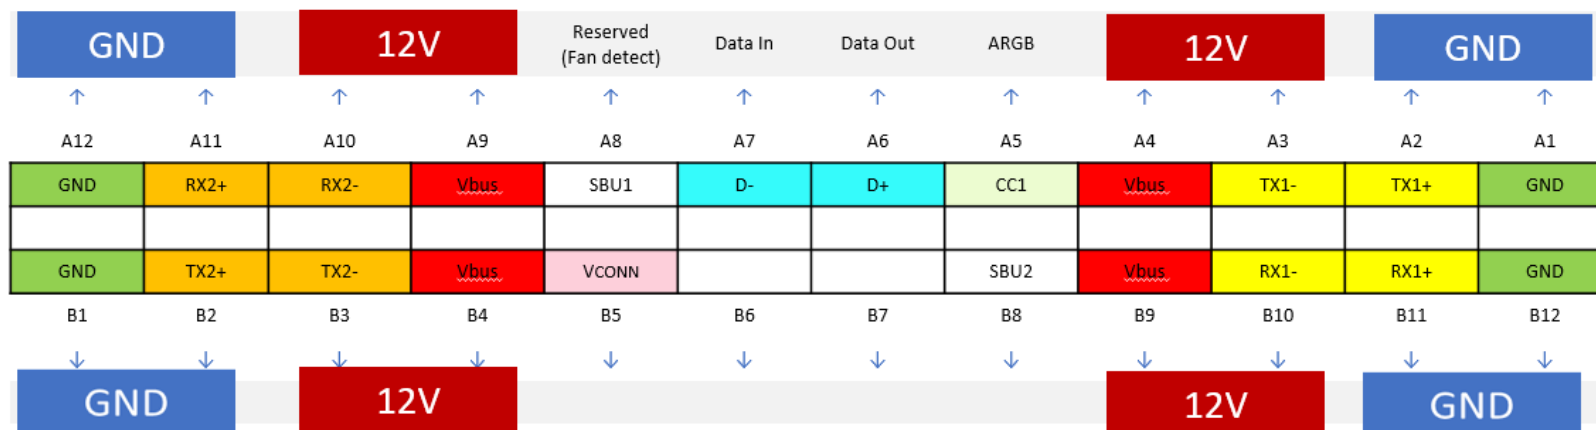

Type-C(24PIN)  
female




(power Input)

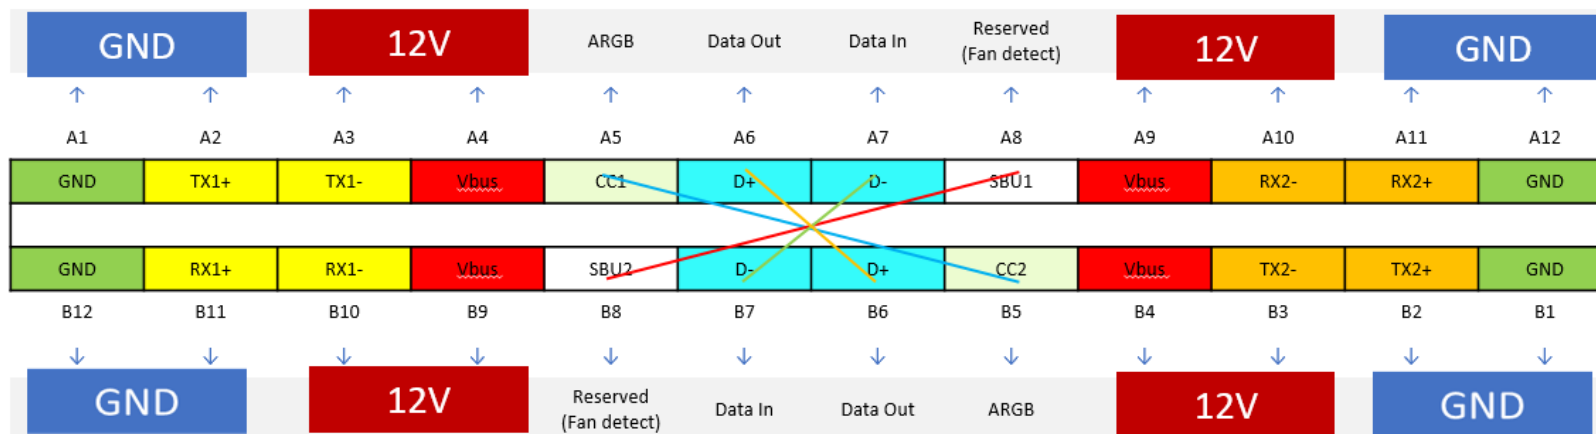


Power connector TYPE C x2 provides 12V 21pin and GND 22pin total 15A. USB 5V 1pin 0.5A

Power connector TYPE C x2 共提供12V 22pin 及 GND 22pin 共15A . USB 5V 1pin 0.5A

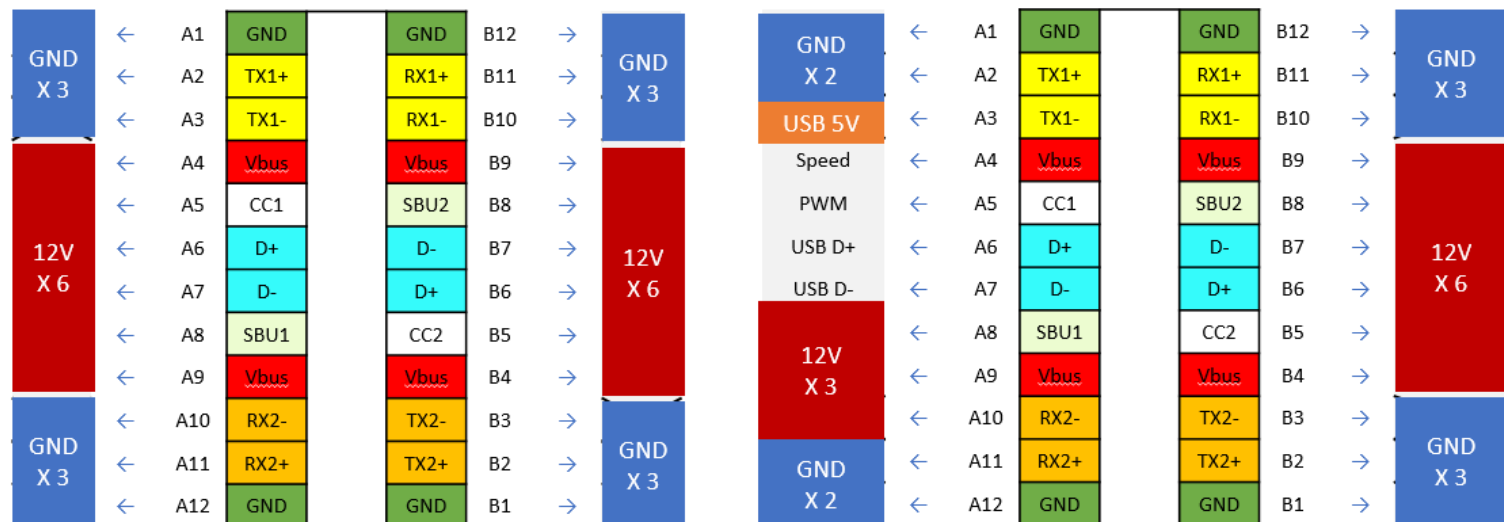

Power connector define 使用16 24PIN male(公頭)

Power + Signal connector define 使用Type-C 16 24PIN male(公頭)

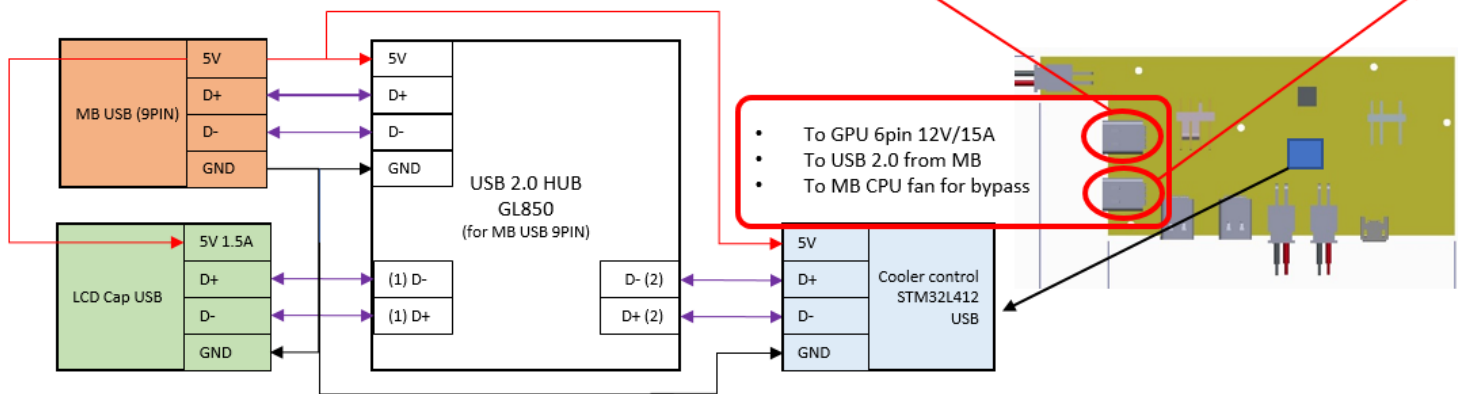

Ⓢ Reserved 腳位，Type-C保留。MCU不指定腳位。

◎ 供電方案-USB供電給MCU，  
SATA供電給FT、FR、LED Strip。